

TSX 561

ALTOZ[®]



ALWAYS AHEAD[®]

MADE IN THE
USA

ALTOZ®

ALWAYS AHEAD®

TSX 561 Zero-Turn Mowers

TorqFlex
front suspension



Torsion axle with
patent-pending track
system

Flat-free tires

ALL-TERRAIN MOWER DECK

Tough...for the Tough Jobs – Heavy-duty, fabricated, reinforced steel deck with three multi-bearing, heat-dissipating deck spindles. Sloped back rear discharge design efficiently processes material.

Pivoting Swing Blades – Industry-exclusive blades pivot when hitting an immovable object to protect the blade, spindle and engine. Forged and heat-treated for exceptional, long-lasting sharpness.

Offset Deck – Allows for better visibility on the trim side for a closer cut underneath and around immobile objects.

Available Deck Widths – 61 in


DIMENSIONS

75" L x 62.5" W x 50" H

ACCESSORIES

Finish-cut Straight Blades - For the professional cut you can count on.

Turf Tracks - Perfect for running over soft ground, rolling hills and sensitive terrain.

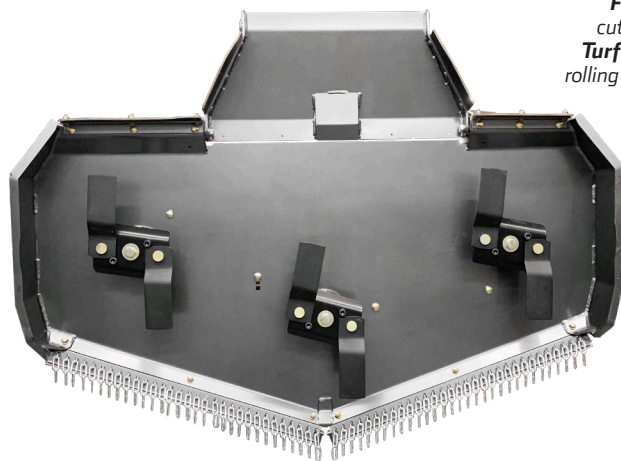

TSX models are available with the industry-exclusive 7-gauge laminated, manufactured deck featuring multi-bearing cast steel spindles and pivoting swing blades.

PRODUCTIVITY DESIGN FEATURES

Maximum Performance Engine – 29.5 hp Kawasaki® FX 852cc engine with multi-port electronic fuel injection.

Electronic Fuel Injection – Powerful and efficient engines to maximize overall performance, fuel economy and provide more reliable starting.

Drive System – High-performance commercial Hydro-Gear® PR 16cc pumps and Parker® TF 195cc wheel motors. Mowing speed up to 10 mph.

Large Capacity Fuel Tank – 8.5 gallons for hours of work without stops.

Tough Tracks – The TRX all-terrain track system delivers maximum traction for stability and low ground pressure for minimal earth compaction.

TOUGHNESS

Frame – Durable C-Channel Frame Rails are laser-cut and formed from heavy-gauge steel for maximum strength and rigidity.

Deck Spindles – Cast steel spindles engineered for strength and durability.

Front Fork – Rugged 3/8 in. thick steel.

Fork Castors – Heavy-duty tapered bearings; sealed and permanently lubricated.

PTO Clutch – 250 ft-lb torque.

Belt Idlers – Sealed bearing belt idler system.

Electrical Connections – Delphi® industrial watertight connectors.

Heavy-duty torsion axle suspension
Wheels with double seals

OPERATOR COMFORT FEATURES

TorqFlex™ Front Suspension – Deliver stability, a smooth ride and reduce operator fatigue.

Rear Torsion Axle Suspension – 11" wide tracks bridge over uneven ground and articulate over the roughest terrain.

ADDITIONAL FEATURES


Rider Suspension Platform with Full Adjustable Coil Springs over Gas Shock – Customize rider comfort for a smooth ride and reduced operator fatigue.

Electric Dial Throttle – More accurate and dependable control.

SoftStart Clutch Engagement – SmarTrac™ Pro control with patented SoftStart clutch control decreases mechanical wear and significantly increases belt life.

PTO Switch – Solid state.

Keyless Push-to-Start – Easy-to-start and protects from unauthorized use.

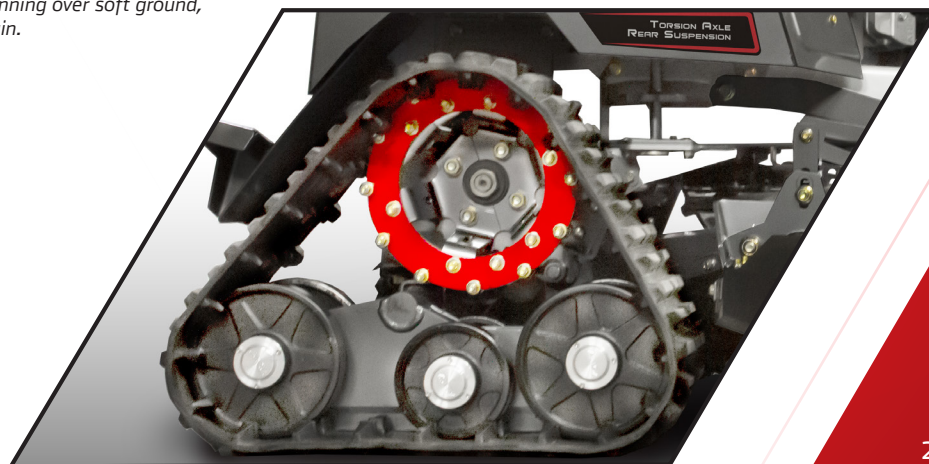

Power through the harshest conditions and rough terrain with flat-free tires and rear-mounted torsional axle suspension and track system.

Altoz reserves the right to change specifications, design and price of products described in the literature without notice. Altoz, Always Ahead, Altoz Precision Mowers, the Altoz logo, TorqFlex, Aero Deck and SmarTrac are trademarks of Altoz, Inc. Other trademarks are the property of their respective owners. The engine horsepower and torque information are provided by the engine manufacturer to be used for comparison purposes only. Actual operating horsepower and torque will be less. ©2021 Altoz, Inc. All rights reserved. Printed in the U.S.A.

ALTOZ, INC.
20502 160TH STREET
GREENBUSH, MN 56726 USA

Altoz.com
855-782-5869
COPYRIGHT ©2021

16-FEB-2021
p/n 9000867 • REV. A